



JS05 JS15 JS25 JS36


Size <ligne>	12 ½"
Height <mm>	4.30
Accuracy <per Month>	±20 sec
Battery Life	3 years

*60 minutes chronograph operation per day




Battery consumption could be minimum by pulling out the stem

Balance Weight <μN·m>	Minute 0.40 Second 0.09 Small 0.02
--------------------------	--

Featured by Shock Detection

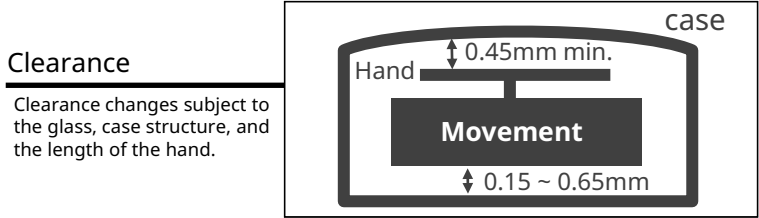

Original Package	500 pcs
------------------	---------

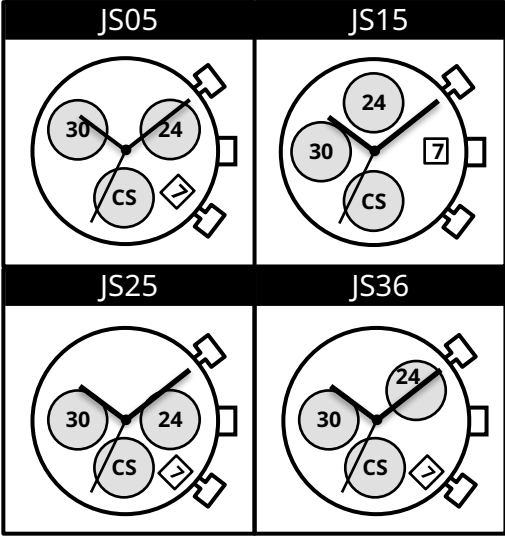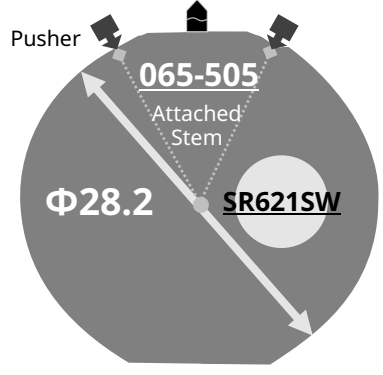

High Hand Ver.
JS06
JS16
JS26
JS36

Time measurement Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

Push "A"
Start and Stop the chronograph


Setting the Time
Set CHRONOGRAPH hands to reset

Setting the Date
Push A to reset the hands position to the ZERO position. And continue to push A to put them forward

Push "B"
Reset the chronograph

DO NOT set Date between 9:00pm - 1:00am

Coordinates		
Mark	X	Y
GM	0	0
DH11	9359	-9359
DH12	-12271	4958

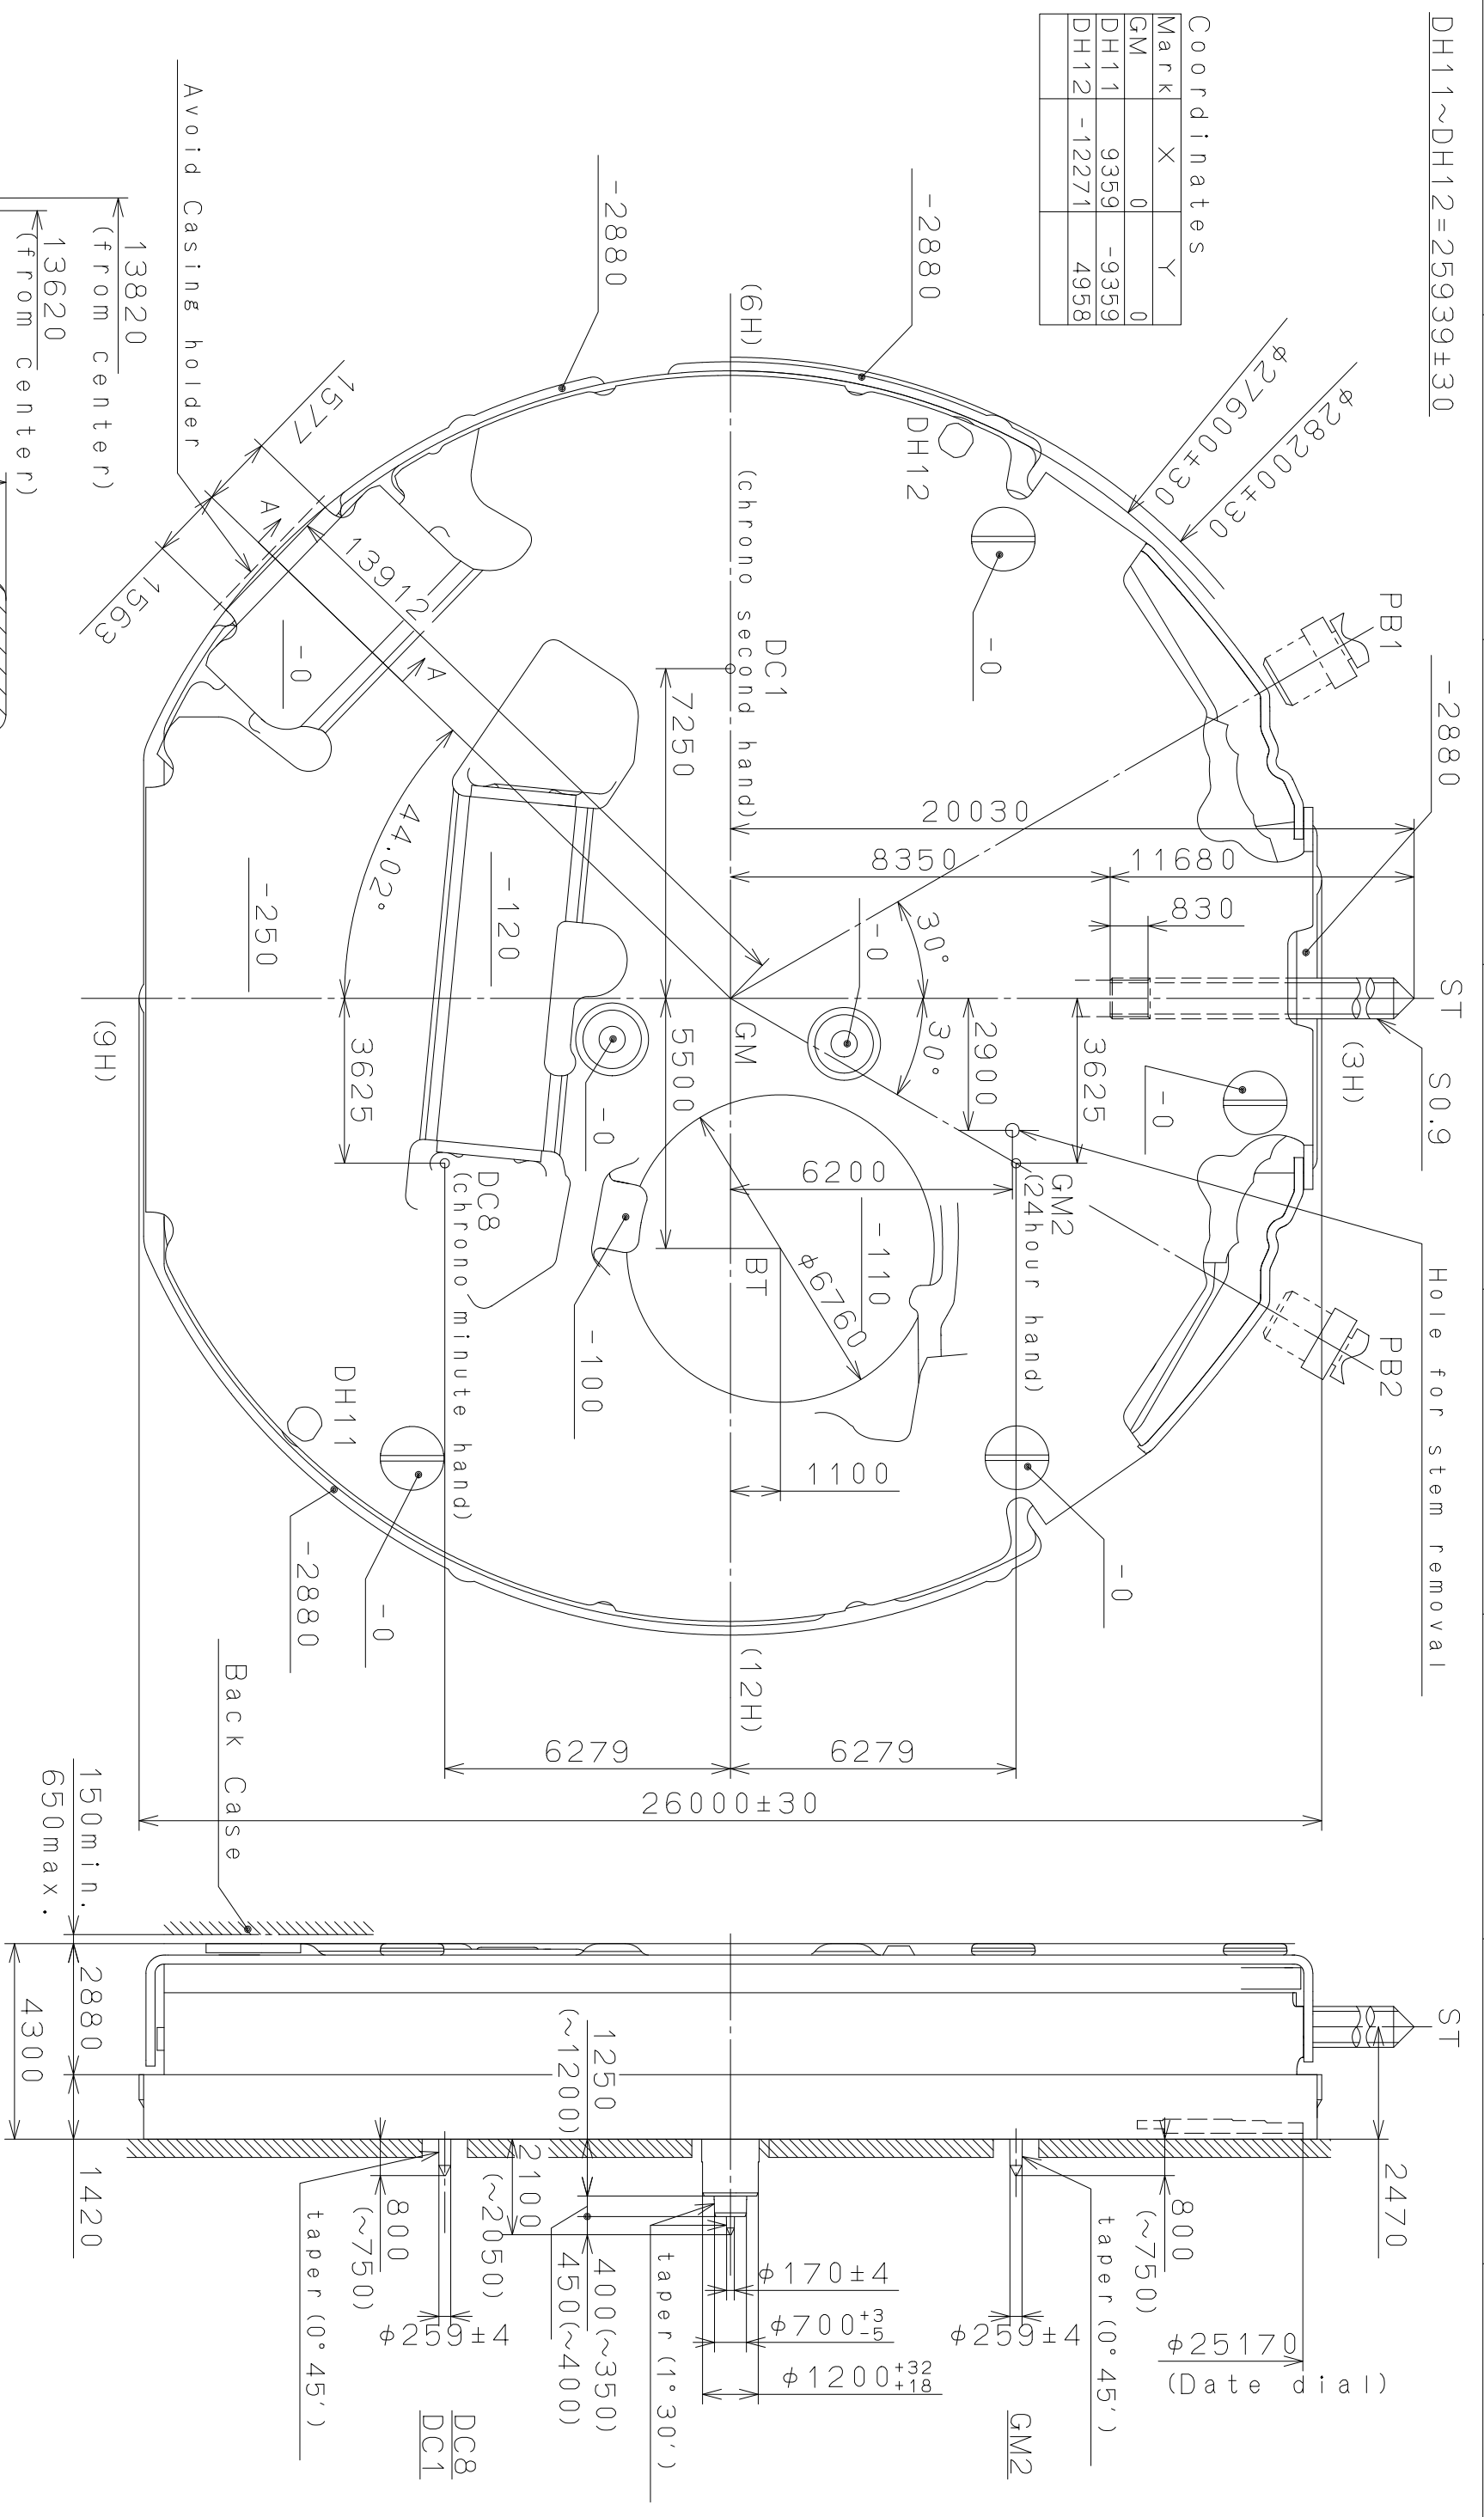

Section PB1,2

Section A-A

Mark	Date	Description	Appro.	Checked	Drawn	Name:
Δ		Alterations	Approved			D. Yamada
Δ		Material				Frame for Case
Δ		Heat Treatment				Drawing No.: JS0500C0
Δ		Hardness				
Δ		Plating				


Quantity	Unit	Cal. NO.:
1	1/1000 mm	JS05

Scale	Parts No.:
7:1	

Material	General Tolerances


Miyota
CITIZEN WATCH CO., LTD. TOKYO, JAPAN

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

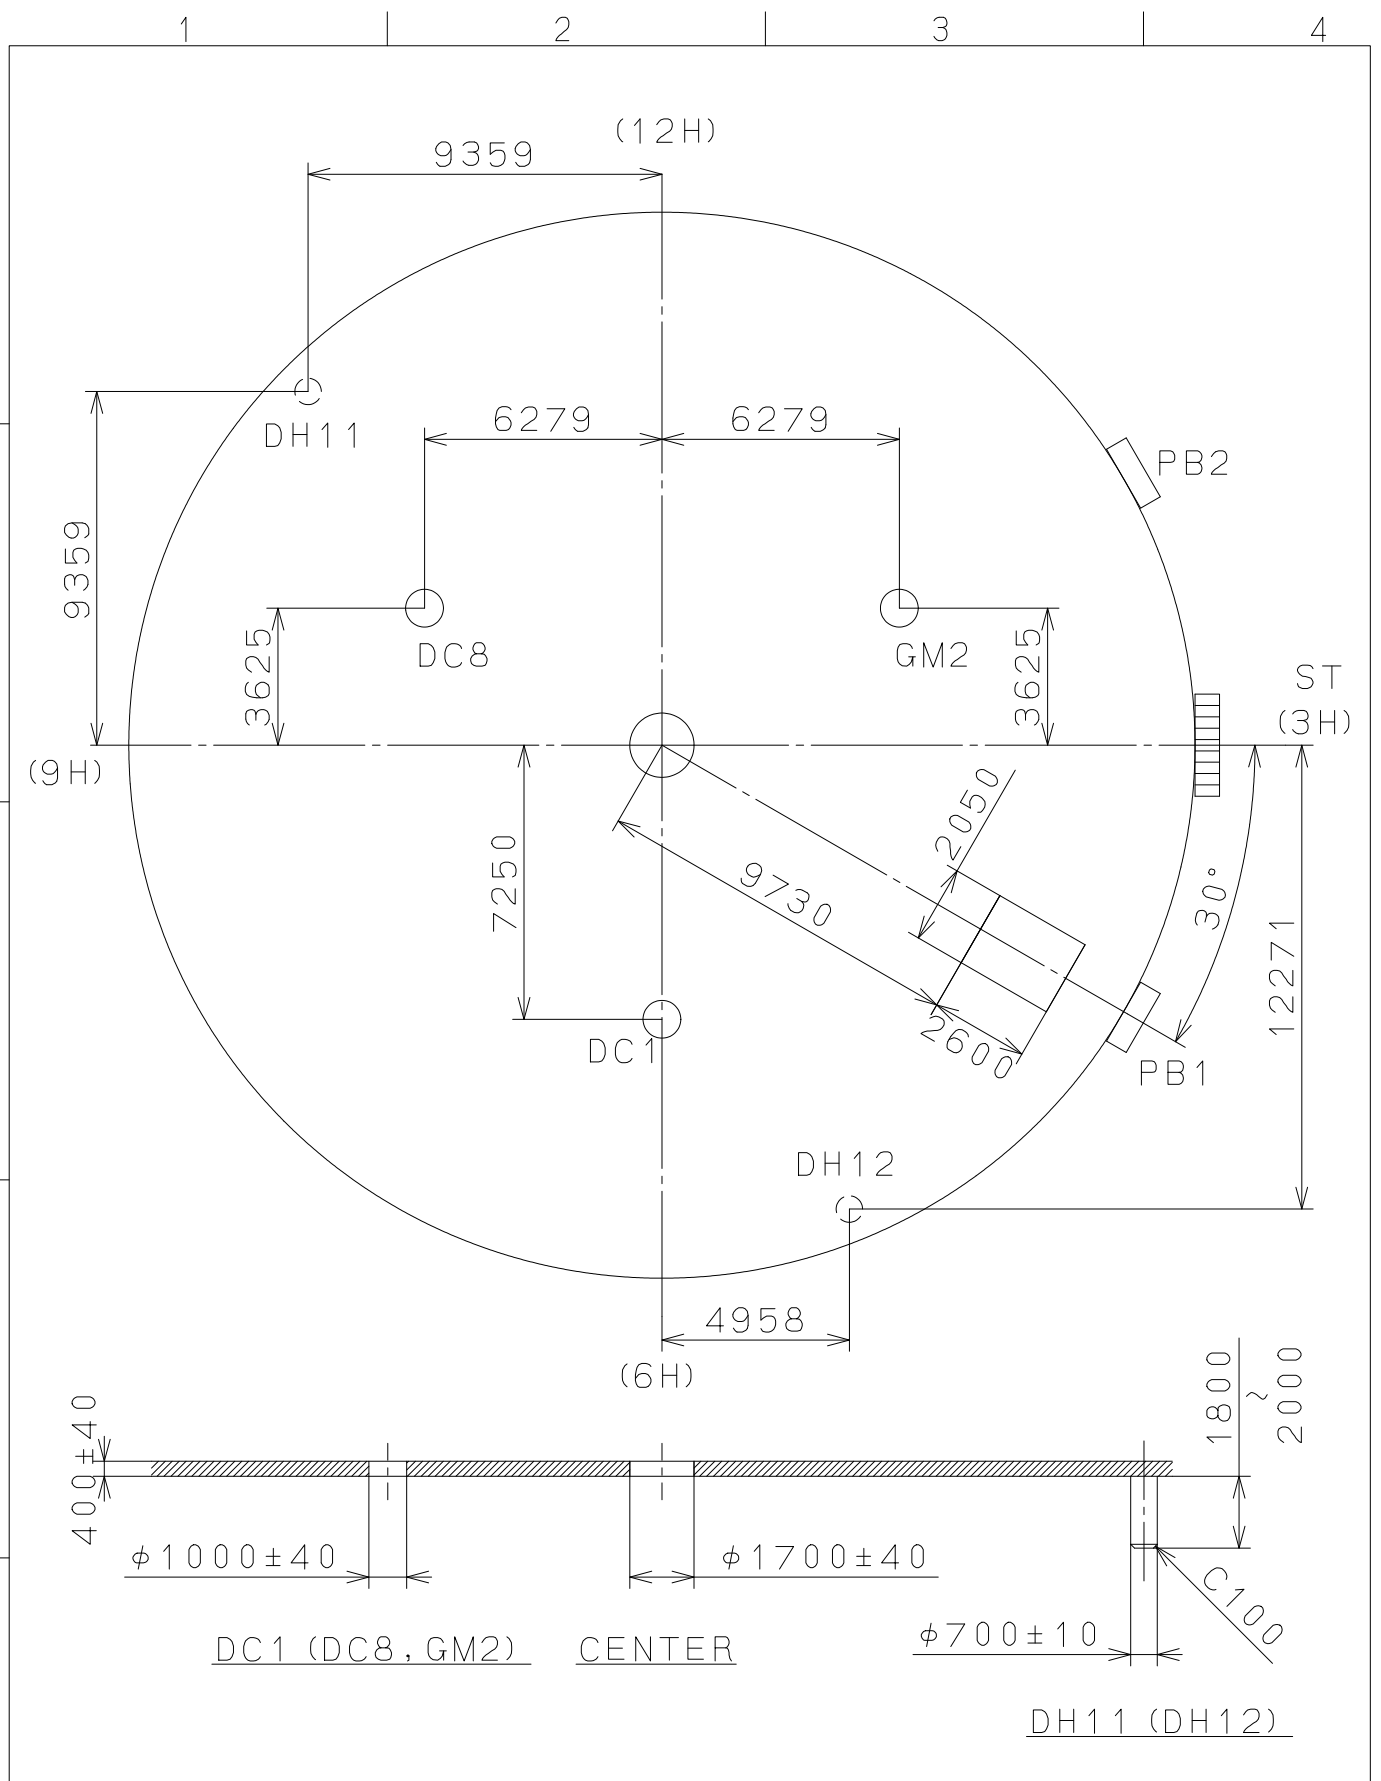

△			Quantity		Cal.NO.:
△			Unit	1/1000 _{mm}	JS05-00C
△			Scale	5 : 1	Parts No.:
△			Date		
△			Drawn		
Mark	Date	Description	Appr.	Checked	Name:
		Alterations	Approved	D. Yamada	Indications for Dial
Material					Drawing No.: JS0500D0
Heat Treatment			General Tolerances		MIYOTA
Hardness			Dimensions		
Plating			Angles		
					CITIZEN WATCH CO., LTD. TOKYO, JAPAN

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

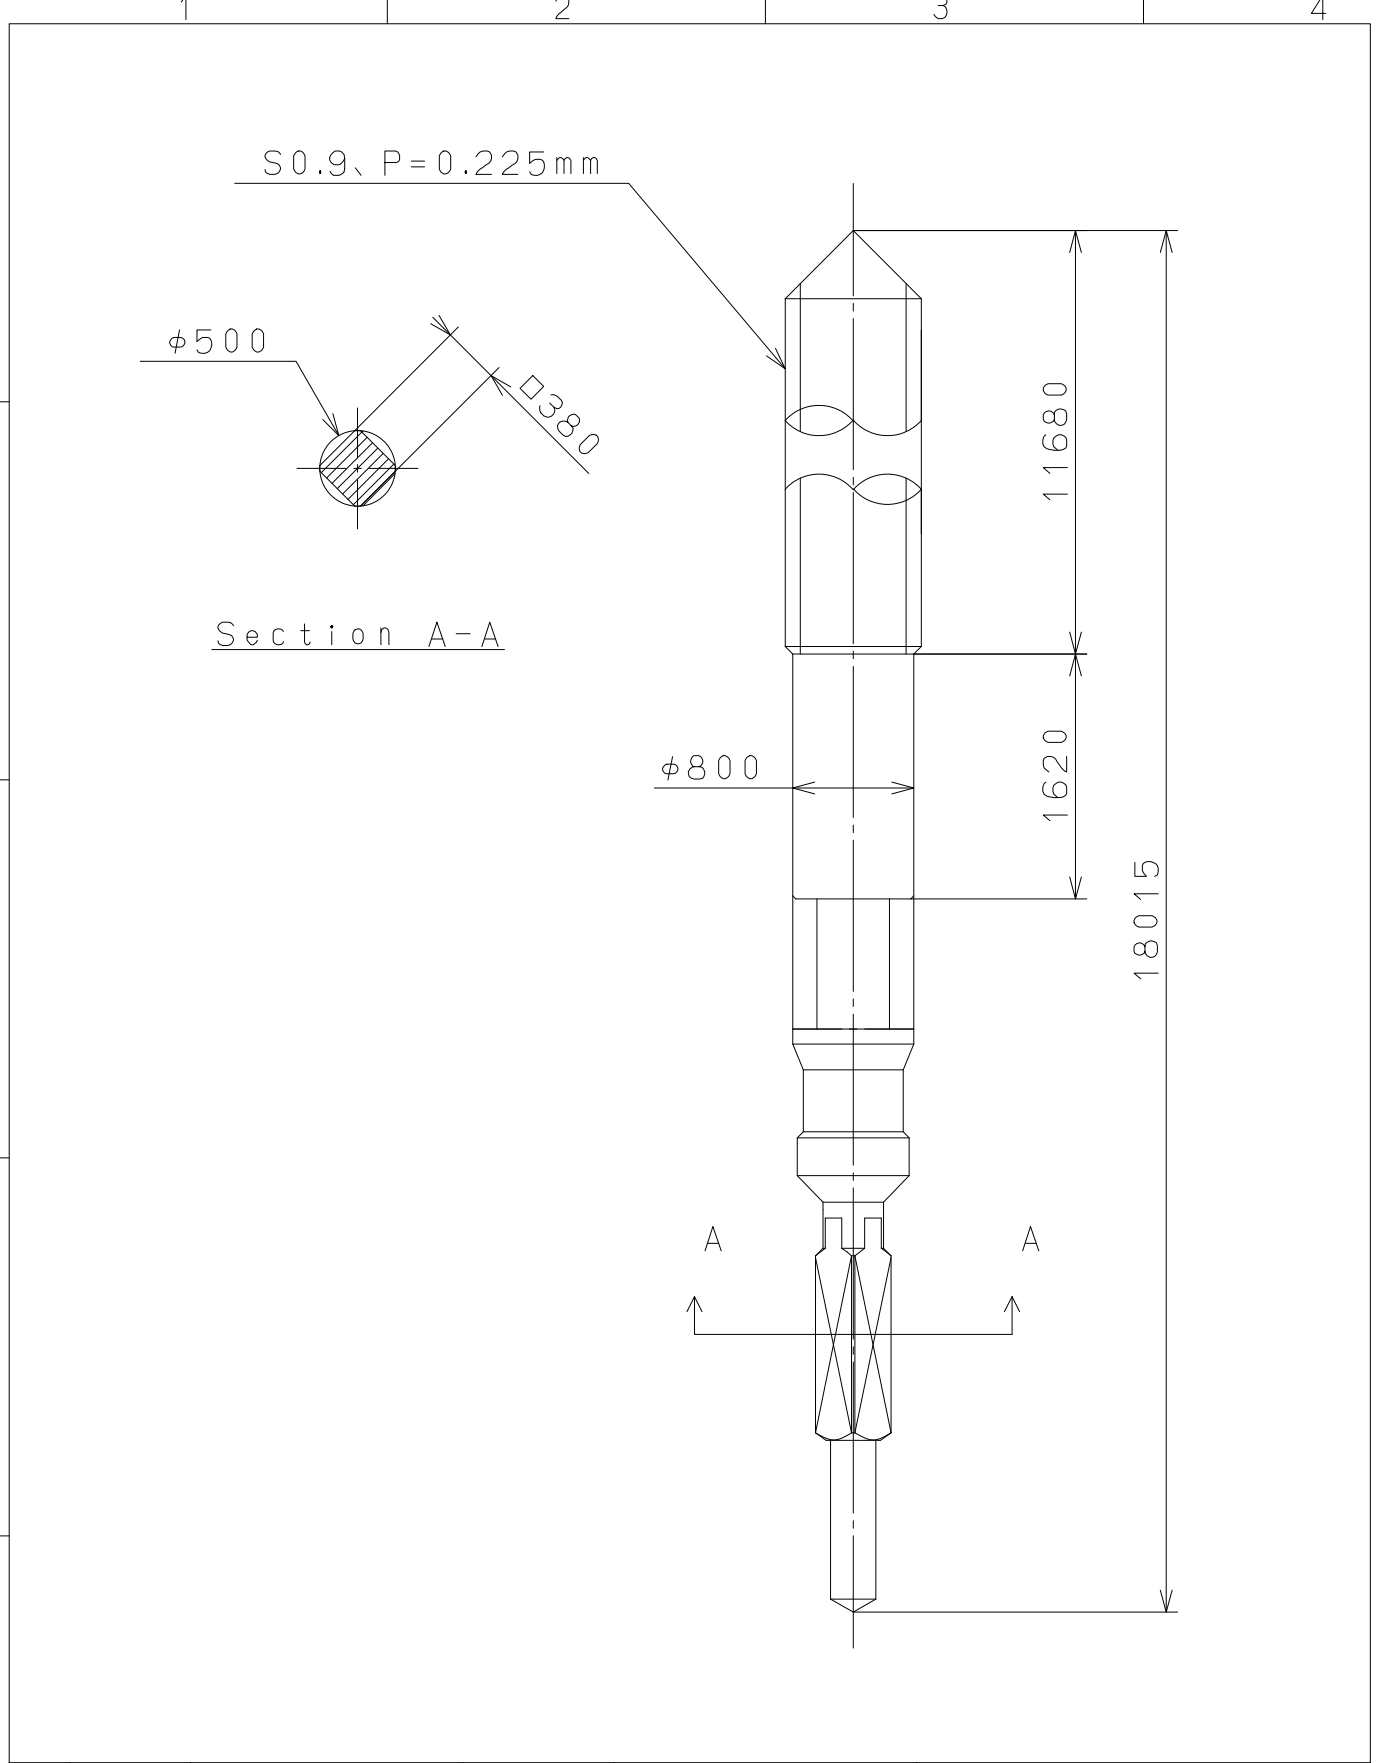

⑤			Quantity		Cal.NO.:
④			Unit	1 / 1000 mm	
③			Scale	20 : 1	Parts No.:
②			Date		065-505
①			Drawn		
Mark	Date	Description	Appro.	Checked	D. Yamada
Alterations			Approved	Name: SETTING STEM	
Material					Drawing No.: 505000S0
Heat Treatment					MIYOTA
Hardness					
Plating					
					CITIZEN WATCH CO., LTD. TOKYO, JAPAN



Cal. JS05/JS06/JS15/JS16/JS25/JS26 Instruction manual

STOPWATCH FUNCTION: SMALL SECOND HAND TIME MEASUREMENT UP TO 29min 59 sec.

A) DISPLAYS AND BUTTONS


B) SETTING THE TIME

C) SETTING THE DATE

D) USING THE STOPWATCH

E) STOPWATCH RESET

A) DISPLAYS AND BUTTONS

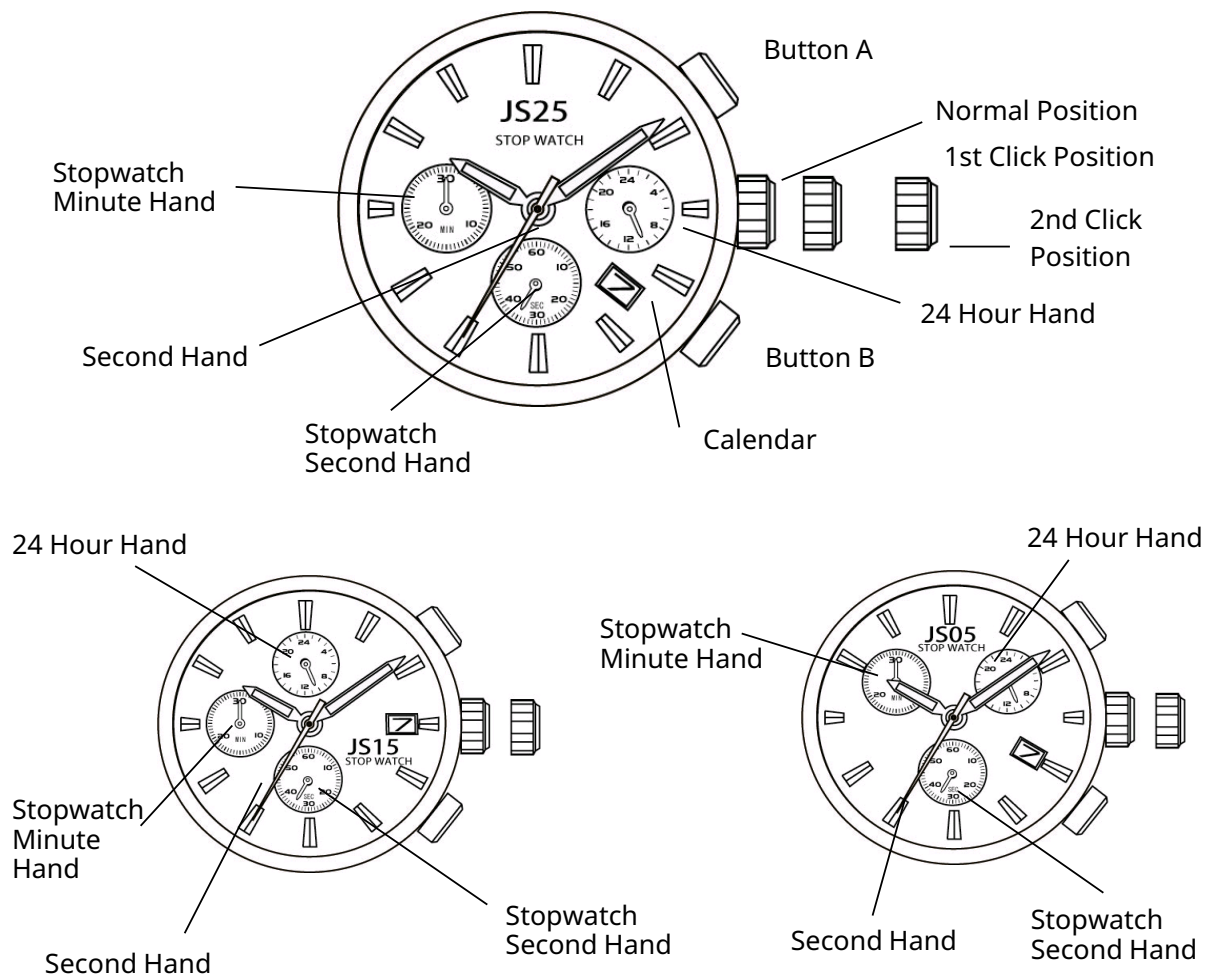

B) SETTING THE TIME

1. Pull the crown out to the 2nd Click Position.
2. Turn the crown to set hour and minute hands.
3. After the time has been set, push the crown back to the Normal position.

C) SETTING THE DATE

1. Pull the crown out to the 1st Click Position.
2. Turn the crown clockwise to set the date.
 - * If the date is set between the hours of around 9:00 PM and 1:00 AM, the date may not change on the following day.
3. After the date has been set, push the crown back to the Normal position.


D) USING THE STOPWATCH

This stopwatch is able to measure and display time in 1/1 second united up to maximum of 30 minutes.

Stopwatch will stop automatically after running continuously for 30 minutes.

【Measuring time with the stopwatch】

1. Press button " A " to start the stopwatch.
2. The stop watch can be started and stopped each time button "A" is pressed.
3. Pressing button "B" resets the stopwatch and stopwatch minute and second hands return to their Zero positions

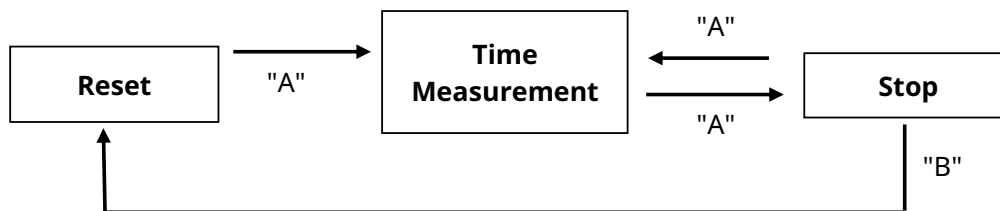

E) STOPWATCH RESET (INCL. AFTER REPLACING BATTERY)

This procedure should be performed when the stopwatch second & minute hand does not return to the Zero position.

1. Pull the crown out to the 2nd Click Position.
2. Press the button "A" to set the stopwatch second hand forward.
Press the button "B" to set the stopwatch second hand back.
 - * The stopwatch minutes hand is synchronized with stop watch second hand.
 - * The stopwatch second hand can be advanced rapidly by continuously pressing button "A" or "B".
3. Once the both hands been zeroed, reset the time and return the crown to its normal position.

These specifications might be changed without prior notice.